

0101 KSS WIRING DUCT (SLOTTED)




Wiring
Ducts

- Material: **UL94V-0** and **M1** flame rated, UL approved PVC.
- Color: Grey.
- PVC service temperature: 85°C
- UL Test up to 50°C
- These devices are for routing of wires within devices in factory installations.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.
- Special color, size, length upon request of reasonable quantity.

The standard wiring duct can be available for non-slip cover, suitable for vertical installations. The item number please specify for example,


Item no. : VD-8→VQ-8, KVD-8→KVQ-8, HVD-8→HVQ-8

Non-slip cover for the size less than 20mm width or bigger than 125mm is available upon request.

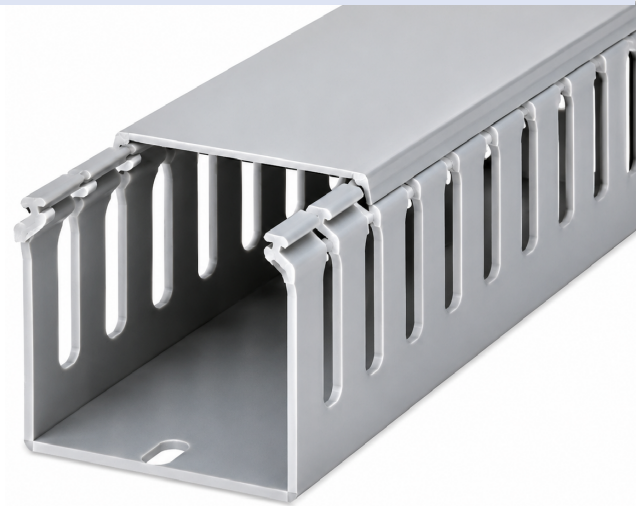

Item No.	W x H	Length
SLOT		
4mm	mm	
HVD-1	25 X 30	2M
HVD-4	40 X 40	
HVD-7	40 X 60	
HVD-8	60 X 60	
HVD-9.7	40 X 80	
HVD-9.8	60 X 80	
HVD-10	80 X 80	
HVD-13	60 X 100	
HVD-14	80 X 100	
HD-8L	100 X 100	

HVD **SLOT : 4mm**

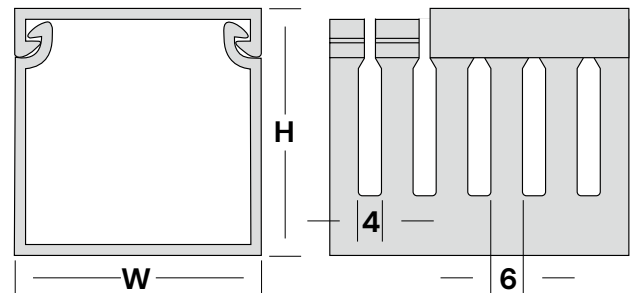

凱士士企業股份有限公司
KAI SUH SUH ENTERPRISE CO., LTD.

