




DBI

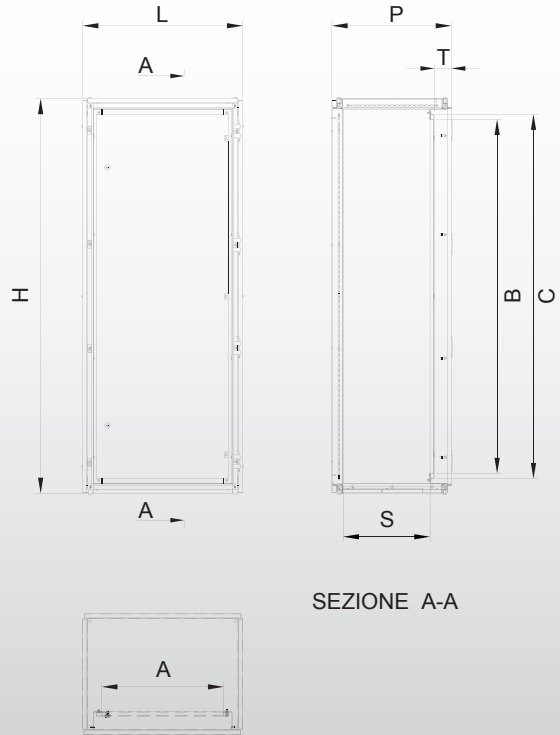

SEZIONE A-A


## ENCLOSURES SERIES OK/AF

### DBI-Inner door

**Description:** the inner doors are used on the OK series, as well as on the monblock series AF. It is installed on an inner frame screwed to the elements of the frame, IP degree protection to the inner section guaranteed is IP44. The hinges allow an opening of 110° and the locking system is made of 2 x 3mm bar lock. The thickness of the door and of the frame is 2.0 mm.

#### Code DBI includes:

- Inner door painted RAL 7035 textured finish
- Fixing frame painted RAL 7035 textured finish
- Hinges for inner door
- Screws and bolts

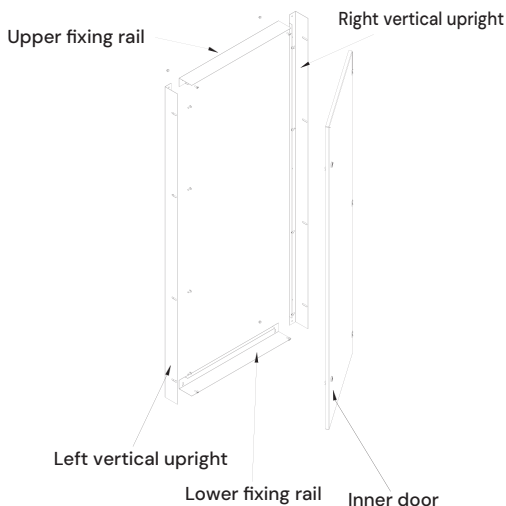

CODE	Nominal dimensions				Other dimensions							
	H	L	P	A	B	C	D	T		S		
								Min.	Max.	Min.	Max.	
DBI126	1200	600	-	423	986	1044	468	72	91	P-115	P-96	
DBI128	1200	800	-	623	986	1044	668	72	91	P-115	P-96	
DBI12A	1200	1000	-	823	986	1044	868	72	91	P-115	P-96	
DBI12C	1200	1200	-	1023	986	1044	531 <sup>(2)</sup>	72	91	P-115	P-96	
DBI146	1400	600	-	423	1186	1244	468	72	91	P-115	P-96	
DBI148	1400	800	-	623	1186	1244	668	72	91	P-115	P-96	
DBI14A	1400	1000	-	823	1186	1244	868	72	91	P-115	P-96	
DBI14C	1400	1200	-	1023	1186	1244	531 <sup>(2)</sup>	72	91	P-115	P-96	
DBI166	1600	600	-	423	1386	1444	468	72	91	P-115	P-96	
DBI168	1600	800	-	623	1386	1444	668	72	91	P-115	P-96	
DBI16A	1600	1000	-	823	1386	1444	868	72	91	P-115	P-96	
DBI16C	1600	1200	-	1023	1386	1444	531 <sup>(2)</sup>	72	91	P-115	P-96	
DBI186	1800	600	-	423	1586	1644	468	72	91	P-115	P-96	
DBI188	1800	800	-	623	1586	1644	668	72	91	P-115	P-96	
DBI18A	1800	1000	-	823	1586	1644	868	72	91	P-115	P-96	
DBI18C	1800	1200	-	1023	1586	1644	531 <sup>(2)</sup>	72	91	P-115	P-96	
DBI18E	1800	1600	-	1423	1586	1644	731 <sup>(2)</sup>	72	91	P-115	P-96	
DBI206	2000	600	-	423	1786	1844	468	72	91	P-115	P-96	
DBI208	2000	800	-	623	1786	1844	668	72	91	P-115	P-96	
DBI20A	2000	1000	-	823	1786	1844	868	72	91	P-115	P-96	
DBI20C	2000	1200	-	1023	1786	1844	531 <sup>(2)</sup>	72	91	P-115	P-96	
DBI20E	2000	1600	-	1423	1786	1844	731 <sup>(2)</sup>	72	91	P-115	P-96	
DBI226	2200	600	-	423	1986	2044	468	72	91	P-115	P-96	
DBI228	2200	800	-	623	1986	2044	668	72	91	P-115	P-96	
DBI22A	2200	1000	-	823	1986	2044	868	72	91	P-115	P-96	
DBI22C	2200	1200	-	1023	1986	2044	531 <sup>(2)</sup>	72	91	P-115	P-96	
DBI22E	2200	1600	-	1423	1986	2044	731 <sup>(2)</sup>	72	91	P-115	P-96	

Notes: The inner door can be installed in any position in depth thanks to these profiles PRPF (available on request).