

▶ NEEDLE SHAPE TERMINAL

MAXIMUM ELECTRIC CURRENT:

26-22A.W.G:9AMPERE 22-16A.W.G:19AMPERE


16-14A.W.G:27AMPERE 12-10A.W.G:48AMPERE

MAXIMUM ELECTRICAL RATING:75°C 600 VOLTS MAX.

INSULATION COLOR:VINYL

12-10A.W.G:YELLOW ■ 22-16A.W.G:RED ■ 16-14A.W.G:BLUE ■

TERMINAL MATERIAL:COPPER

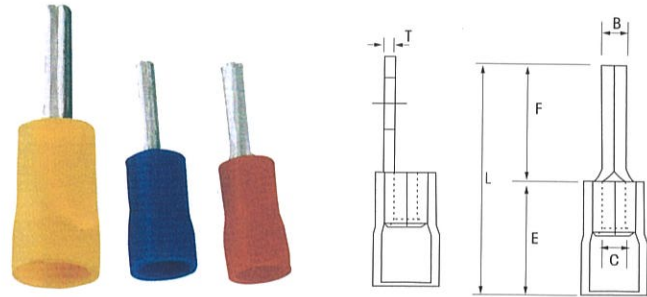

WIRE RANGE A. W. G. mm ²	ITEM NUMBER	DIMENSION INCH MM							CRIMPING TOOL	
		B	F	L	E	D	C	T		
22-16A. W. G. 0.5-1.5mm ²	PTV1-9	.075	.354	.740	.394	.157	.067	.030	IZUMI MODEL WITH DIE INDEX COLOR:RED OR K. V. MODEL FXT2000A HRI-126 WITH DIE INDEX COLOR:RED	
		1.9	9.0	18.8	10.0	4.0	1.7	0.75		
	PTV1-10	.075	.394	.780	.394	.157	.067	.030		
		1.9	10.0	19.8	10.0	4.0	1.7	0.75		
	PTV1-12	.075	.472	.858	.394	.157	.067	.030		
		1.9	12.0	21.8	10.0	4.0	1.7	0.75		
PTV1-13	.075	.512	.898	.394	.157	.067	.030			
	1.9	13.0	22.8	10.0	4.0	1.7	0.75			
PTV1-14	.075	.551	.937	.394	.157	.067	.030			
	1.9	14.0	23.8	10.0	4.0	1.7	0.75			
PTV1-16	.075	.630	1.016	.394	.157	.067	.030			
	1.9	16.0	25.8	10.0	4.0	1.7	0.75			
16-14A. W. G 1.5-2.5Gmm ²	PTV2-9	.075	.354	.740	.394	.177	.091	.031	IZUMI MODEL34 WITH DIE INDEX COLOR:BLUE OR K. V. MODEL FXT2000A HRI-126 WITH DIE INDEX COLOR:BLUE	
		1.9	9.0	18.8	10.0	4.5	2.3	0.8		
	PTV2-10	.075	.394	.780	.394	.177	.091	.031		
		1.9	10.0	19.8	10.0	4.5	2.3	0.8		
	PTV2-12	.075	.472	.858	.394	.177	.091	.031		
		1.9	12.0	21.8	10.0	4.5	2.3	0.8		
PTV2-13	.075	.512	.898	.394	.177	.091	.031			
	1.9	13.0	22.8	10.0	4.5	2.3	0.8			
PTV2-16	.075	.630	1.024	.394	.177	.091	.031			
	1.9	16.0	26.0	10.0	4.5	2.3	0.8			
12-10A. W. G 4-6Gmm ²	PTV5-13	.110	.551	1.063	.512	.248	.134	.039		IZUMI MODEL5 WITH DIE INDEX COLOR:YELLOW OR K. V. MODEL FXT2000A HRI-126 WITH DIE INDEX COLOR:YELLOW
		2.8	14.0	27.0	13.0	6.3	3.4	1.0		