




# EURO QE 4

Article: **42454**



Earth Terminal Block – Yellowgreen  
Spring/Screwless connection – 4-6mm<sup>2</sup> / 10AWG - Width 6 mm



## GENERAL DATA

Series	<b>EURO QE 4</b>
Item	<b>42454</b>
Weight/Piece	<b>12.8 g</b>
Catalog	<b>01</b>
Customs tariff	<b>85369095</b>
Colour	<b>Yellowgreen</b>
Q.ty p.pck.	<b>10</b>
Q.ty p. box	<b>-</b>

## TECHNICAL DATA / DIMENSIONS

### Dimensions

Width mm	6
Length mm	58
Height mm	34.5
Mounting type (EN 60715)	Omega TH35

### Technical data

Maximum load current	-
Insulating material	PA
Self-extinguishing degree acc. to UL94	V0
Rated surge voltage	-
Pollution degree	3
Surge voltage category	III
Insulating material group	I
Nominal Voltage	-
Nominal Current	-
Temperature index, insulating material – Elec. UL 746 B - RTI	130°C
Static insulating material lower permissible temperature	-60°C

### Connection data

Conductor cross-section solid min/max	1.5 / 6 mm <sup>2</sup>
Conductor cross-section stranded min/max	1.5 / 6 mm <sup>2</sup>



AWG min/max	24-10AWG
Max conductor cross-section stranded with ferrule with plastic sleeve DIN 46228/4	4 mm <sup>2</sup> / L=18 mm
Max conductor cross-section stranded with ferrule without plastic sleeve DIN 46228/1	6 mm <sup>2</sup> / L=18 mm
Stripping length	max 15 mm
Spring	Stainless steel
Current bar	Tin Plated copper alloy
Earth foot	Tin Plated copper alloy

## APPROVALS



40018076

REG B801

**EN60947-7-2**4mm<sup>2</sup>**EN60068-2-11**


Salt mist test for 96 hours

**ENEL DV25****UL1059**

E203985

AWG 24-10

## TECHNICAL DRAWINGS

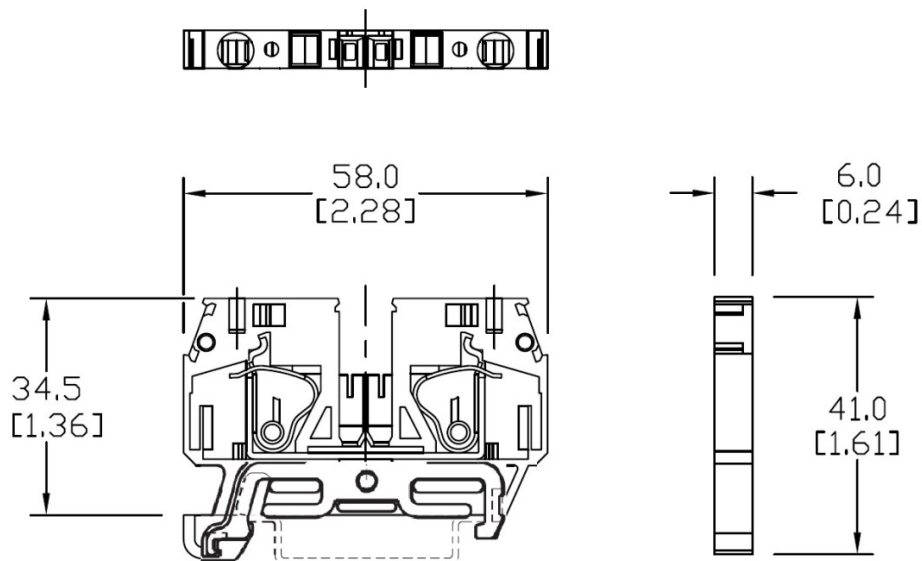



## ACCESSORIES

### Marking

Item	Description
<b>42090</b>	Blank large marking tags for EURO Q - 4,8x8,4
<b>42091</b>	Blank large vertical marking tags for EURO Q - 12x4,5
<b>438MFC0612TB</b>	Tags 6x12 for MI x 438MWK0512TBA adapter(1box=780pcs)
<b>42092</b>	Adapter Vertical Support -5x12(1box=250pcs)
<b>438MIQ0512TBA</b>	Adapter x Tb MI EQ -Weid-WDU-ZDU/Klemsan-5x12(1box=250pcs)

### DIN RAIL system - Mounting and Installation material

Item	Description
<b>43910</b>	Steel Omega rail 35/7,5mm - 2mt length
<b>43910/F</b>	Slotted steel Omega rail 35/7,5mm - 2mt length
<b>43911</b>	Steel Omega rail 35/15mm - 2mt length
<b>43911/F</b>	Slotted steel Omega rail 35/15mm - 2mt length
<b>43028</b>	Angled support bracket
<b>43442</b>	EURO STOP - End bracket width 9
<b>43444</b>	EURO STOP - End bracket width 6
<b>43447</b>	EURO STOP - Snap-on end bracket width 6

### Additional items

Item	Description
<b>42012</b>	End plate